

WA826

USB 2.0 Kabelkonfektionen USB 2.0 Cable Assemblies

Technische Daten / Technical Data

Isolierkörper	Thermoplast, UL94 V-0
Insulator	Thermoplastic, UL94 V-0
Kontaktmaterial	Kupferlegierung
Contact Material	Copper alloy
Kontaktfläche	Vergoldet 30µ"
Contact Surface	Gold plated 30µ"
Durchgangswiderstand	< 30mΩ
Contact Resistance	< 30mΩ
Isolationswiderstand	> 1000MΩ
Insulation Resistance	> 1000MΩ
Spannungsfestigkeit	500V _{AC} @ 1min
Test Voltage	500V _{AC} @ 1min
Nennstrom	1,5A
Current Rating	1.5A
Temperaturbereich	-20°C ... +80°C
Temperature Range	-20°C ... +80°C










© W+P PRODUCTS

USB 2.0 Cable

Leads: AWG28/AWG24
Outer Diameter: 5.0mm
Max. Length: 500cm recommended

Passende Produkte:
 Mating Products:
W824 W825

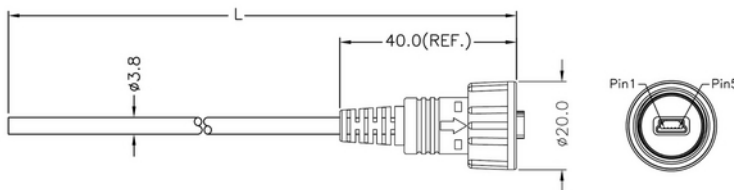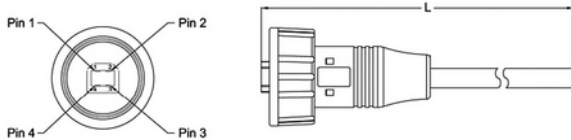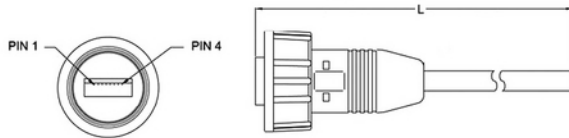

Mini-USB 2.0 Cable
Leads: AWG28
Outer Diameter: 3.8mm

Series	USB Type*	Housing*	Lock Type*	Length*	USB Type*	Housing*	Lock Type*
WA826	1	1	17	100	0	0	00
	1 USB A male 2 USB B male 3 Mini-USB B male	1 Gerade Straight 2 Gewinkelt (nicht Mini-USB) Right-angled (not Mini-USB)	17 Gewinde IP67 Screw IP67 27 Bajonett IP67 Bayonet IP 67 (not Mini-USB)	XXX Länge in cm Length in cm	0 Unbestückt No connector 1 USB A male 2 USB B male 3 Mini-USB B male	0 Unbestückt No connector 1 Gerade Straight 2 Gewinkelt (nicht Mini-USB) Right-angled (not Mini-USB)	00 Unbestückt No connector 17 Gewinde IP67 Screw IP67 27 Bajonett IP67 (nicht Mini-USB) Bayonet IP67 (not Mini-USB)

* Dies ist ein **Bestellbeispiel** - bitte durch Ihre Spezifikationen ersetzen.
 * This is an **order example** - please replace by your specifications.

TEL +49 5223 98507-0
 FAX +49 5223 98507-50

W+P PRODUCTS

E-MAIL sales@wppro.com
 WEBSITE www.wppro.com