


Power Supply Crimp-Rast Buchsengehäuse, RM 5,08mm Power Supply Friction-Lock Female Housings, 5.08mm Pitch

Technische Daten / Technical Data




Isolierkörper <i>Insulator</i>	Thermoplast, nach UL94 V-2 <i>Thermoplastic, rated UL94 V-2</i>
Kontaktmaterial <i>Contact Material</i>	Kupferlegierung <i>Copper alloy</i>
Aderquerschnitt <i>Applicable wire Gauge</i>	AWG 24 ~ 18
Durchgangswiderstand <i>Contact Resistance</i>	< 20 mΩ
Isolationswiderstand <i>Insulation Resistance</i>	> 1000 MΩ
Spannungsfestigkeit <i>Test Voltage</i>	1000 V AC
Nennspannung <i>Voltage Rating</i>	250 V DC max.
Nennstrom <i>Current Rating</i>	bis zu 10 A <i>up to 10 A</i>
Temperaturbereich <i>Temperature Range</i>	-25 °C ... +85 °C

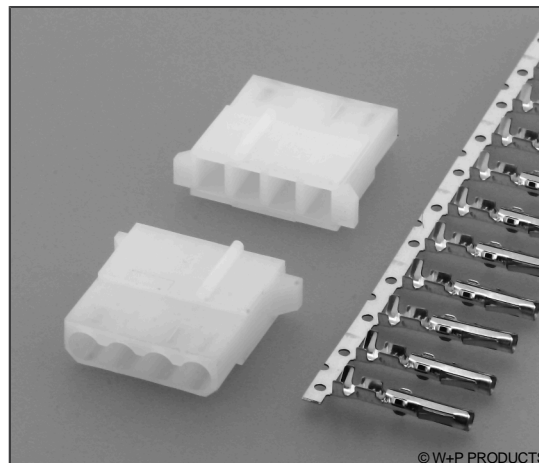

© W+P PRODUCTS

Passende Gegenstecker:
Compatible Connectors:

538

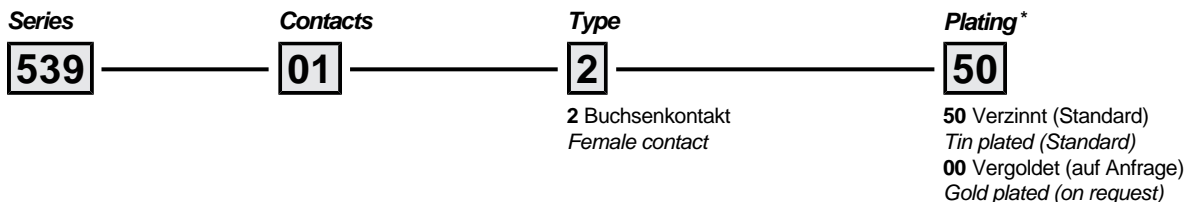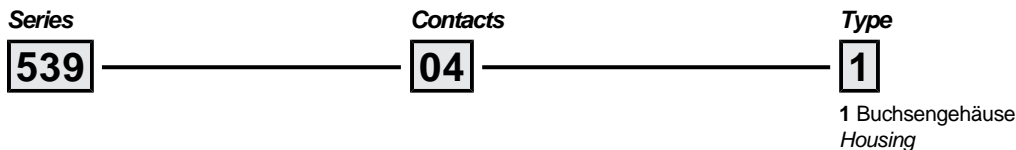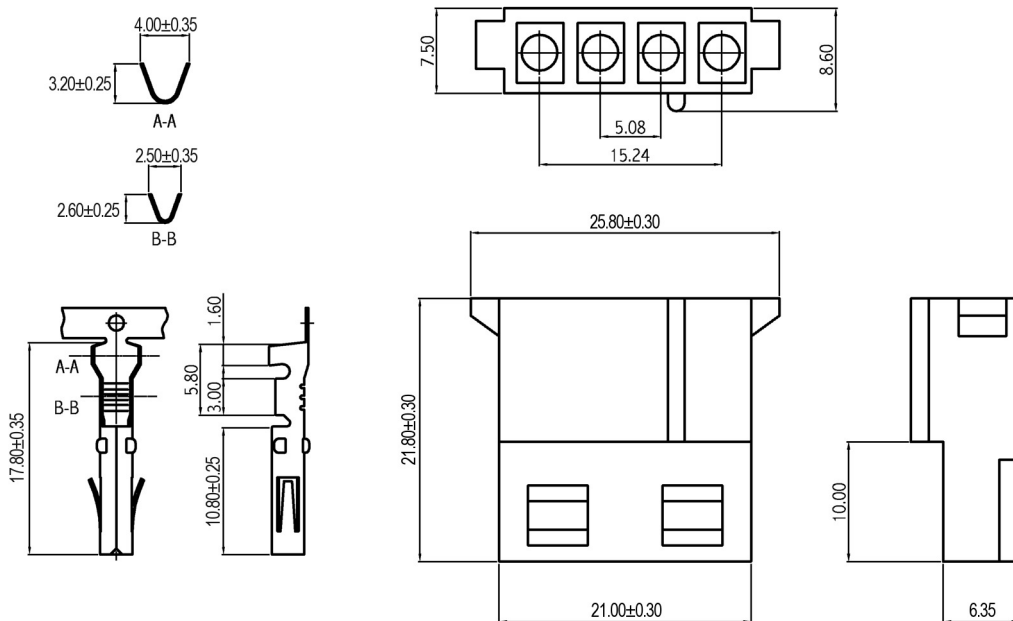

* Dies ist ein **Bestellbeispiel** -
bitte durch Ihre Spezifikationen ersetzen.
* This is an **order example** -
please replace by your specifications.