


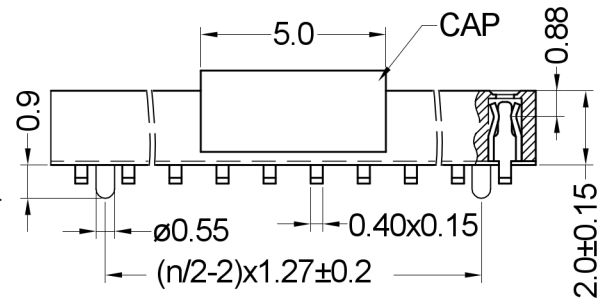


On release of the data sheet, previous releases are no longer valid. Dimensions and tolerances are subject to change.


Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the registration of a utility model or design.

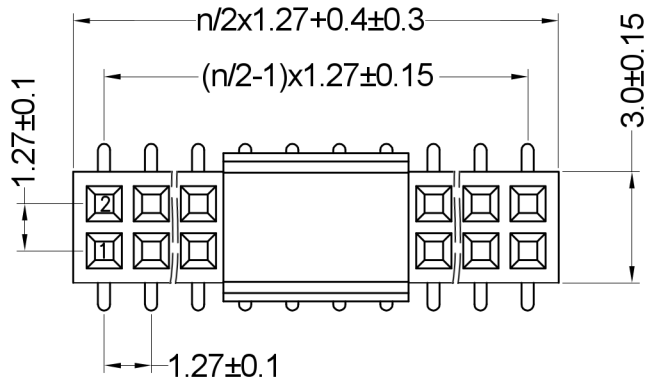

SPECIFICATIONS

Insulator Material:	Thermoplastic, rated UL94 V-0
Rated Current:	1 A
Contact Resistance:	20 mΩ Max
Withstand Voltage:	500 V AC/DC
Insulation Resistance:	1000 MΩ Min
Operation Temperature:	-40 °C to +105°C
Contact Material:	Copper alloy
Contact Plating:	Au over Ni
Max. Processing Temp:	230 °C for 30-60 seconds (260 °C for 10 seconds)

Recommended PCB Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

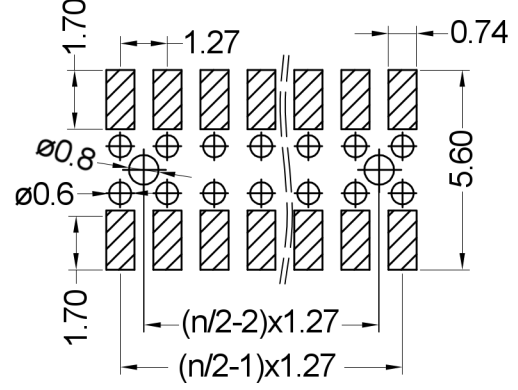

Mates with □0.40mm pin header

Series	Contacts *	Plating	Locating Pegs *	Packaging *
46-6062	020 004-100 Zweireihig Double row	00 Vergoldet Gold plated	10 00 Ohne Pos.hilfen W/o loc. pegs 10 Mit Pos.hilfen With loc. pegs	ST ST PPST PPTR

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL



Serial Number 46-6062			
Part Name SMT Female Header, 127mm Pitch, Vertical, Double Row, Dual Entry			
Creation date 2018-12-19	Drawn AL	Approved PS	Approval date 2022-01-18
RoHS 2011/65/EU compliant		Scale %	Sheet