

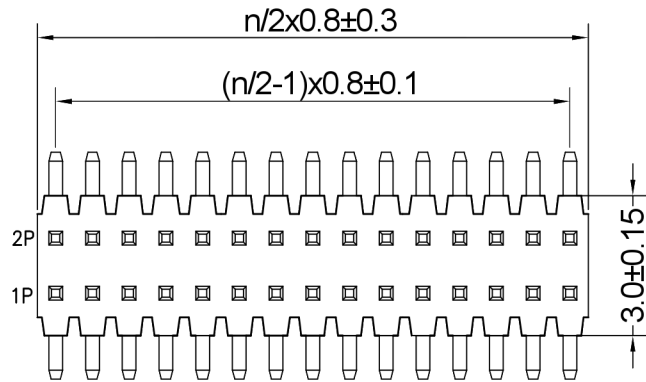
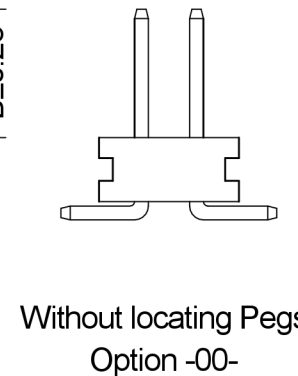



On release of the data sheet, previous releases are no longer valid. Dimensions and tolerances are subject to change.

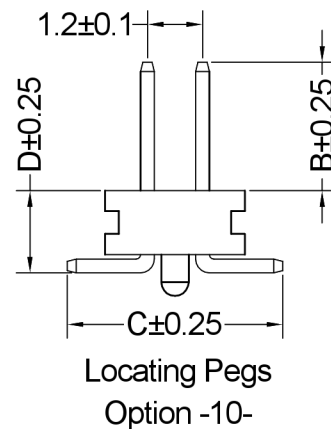

Insulator	Thermoplastic, rated UL94 V-0
Contact Material	Copper alloy
Contact Surface	Au over Ni
Contact Resistance	30 mΩ max.
Insulation Resistance	1000 MΩ min.
Test Voltage	500 V AC/DC
Current Rating	0.75 A
Temperature Range	-40 °C ... +105 °C
Processing Temperature	230 °C for 30-60 seconds (260 °C for 10 seconds)

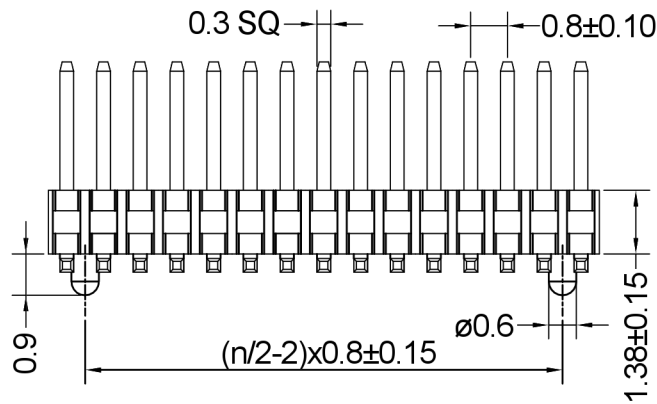

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

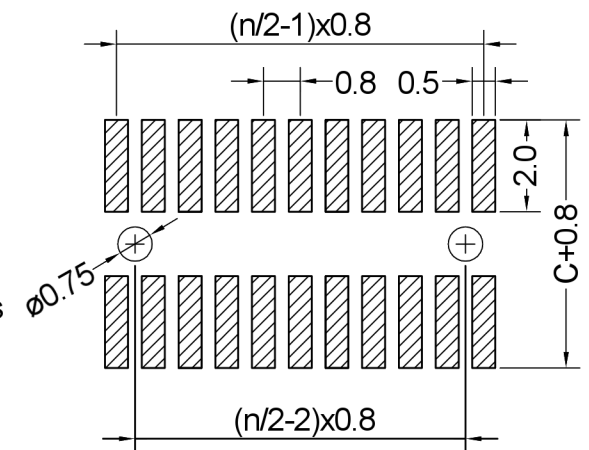

Series **46-7078** Contacts* **016** Dimensions* **11** Plating **00** Locating Pegs* **00** Packaging* **PPST**

004-100

11 B=2,80 C=4,60 D=1.80mm
99 Customer-specific

00 Vergoldet
Gold plated

00 Ohne Pos.hilfen
W/o loc. pegs
10 Mit Pos.hilfen
With loc. pegs

ST In Stangen ohne Pick&Place-Pads / In tubes w/o Pick&Place-Pads
PPST In Stangen mit P&P-Pads / In tubes with P&P-Pads
PPTR Tape & Reel mit P&P-Pads / Tape & Reel with P&P-Pads

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages and may be prosecuted in the event of the grant of a patent or the registration of a utility model or design.

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL



Serial Number 46-7078			
Part Name SMT Pin Header 0.80 x 1.20mm Pitch vertical			
Creation date 2019-03-04	Drawn AL	Approved PS	Approval date 2019-03-04
REACH (EG) Nr. 1907/2006 RoHS 2011/65/EU compliant		Scale %	Sheet