


Technische Daten / Technical Data

Isolierkörper	Thermoplast, nach UL94 V-0
<i>Insulator</i>	<i>Thermoplastic, rated UL94 V-0</i>
Kontaktmaterial	Kupferlegierung
<i>Contact Material</i>	<i>Copper alloy</i>
Kontakttoberfläche	Sel. Au / Sn über Ni
<i>Contact Surface</i>	<i>Sel. Au / Sn over Ni</i>
Durchgangswiderstand	< 30 mΩ
<i>Contact Resistance</i>	< 30 mΩ
Isolationswiderstand	> 3000 MΩ
<i>Insulation Resistance</i>	> 3000 MΩ
Spannungsfestigkeit	500 V AC
<i>Test Voltage</i>	<i>500 V AC</i>
Nennstrom	1 A
<i>Current Rating</i>	<i>1 A</i>
Temperaturbereich	-40 °C ... +105 °C
<i>Temperature Range</i>	<i>-40 °C ... +105 °C</i>

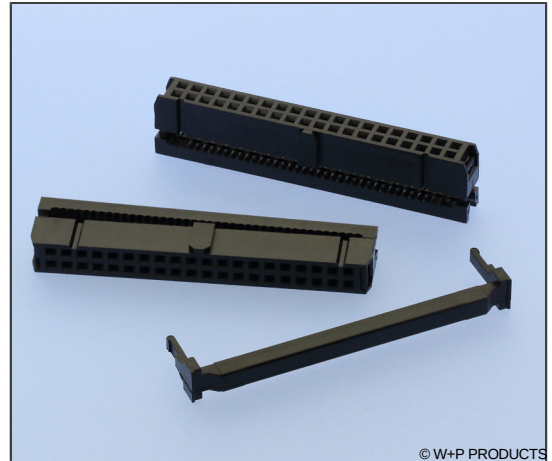

© W+P PRODUCTS

Passende Gegenstecker:

*Compatible Connectors:***137 138**Flachbandkabel/ *Flat Cables:***3560-1-267-xx 3560-2-267-xx**