


Flachbandkabel im Rastermaß 1,27mm mit erweitertem Temperaturbereich Flat Cable 1.27mm Pitch with Extended Temperature Range


Technische Daten / Technical Data

Kontaktmaterial	Kupfer, verzinkt
Contact Material	Copper, tin-plated
Isolationswiderstand	> 100 MΩ/km
Insulation Resistance	> 100 MΩ/km
Temperaturbereich	-40 °C ... +105 °C
Temperature Range	-40 °C ... +105 °C


Brandverhalten nach UL:	VW-1
Reaction to Fire Rating UL:	VW-1

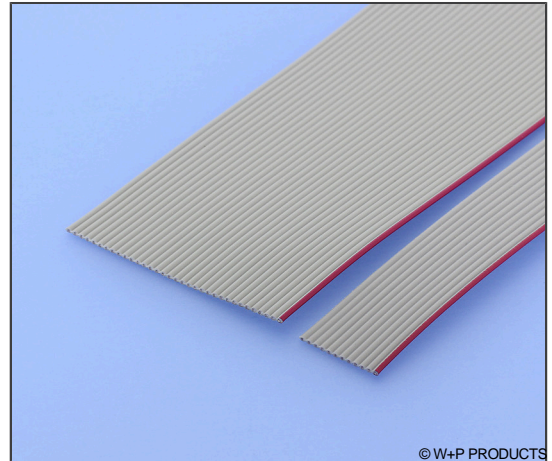

© W+P PRODUCTS

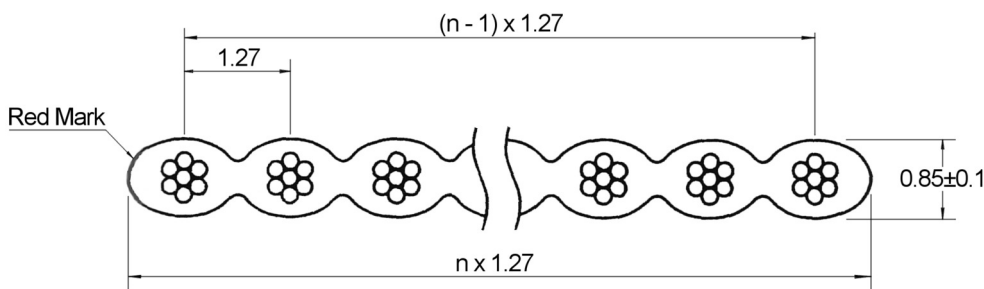

UL-Typ <i>UL-Style</i>	2651
Leitwiderstand <i>El. Resistance</i>	237 Ohm/km (AWG 28)
Spannungsfestigkeit <i>Test Voltage</i>	2000 V
Nennspannung <i>Voltage Rating</i>	300 V

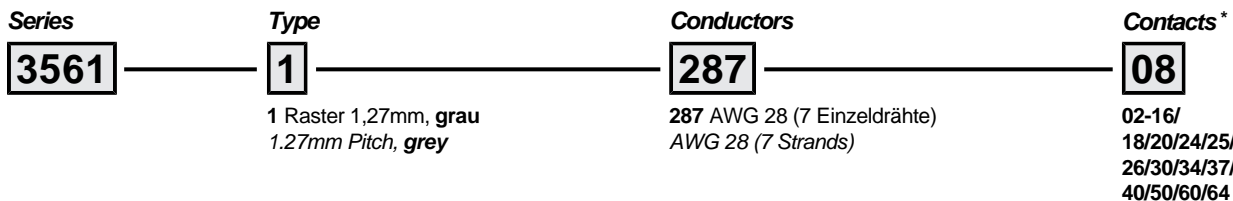

* Dies ist ein **Bestellbeispiel** -
bitte durch Ihre Spezifikationen ersetzen.
* This is an **order example** -
please replace by your specifications.