



Technische Daten / Technical Data

Isolierkörper <i>Insulator</i>	Thermoplast, nach UL94 V-0 <i>Thermoplastic, rated UL94 V-0</i>
Farbe <i>Colour</i>	Grau <i>Grey</i>
Kontaktmaterial <i>Contact Material</i>	Kupferlegierung <i>Copper alloy</i>
Aderquerschnitt <i>Applicable wire Gauge</i>	AWG 20-18 (Litze) <i>AWG 20-18 (stranded wire)</i>
Durchgangswiderstand <i>Contact Resistance</i>	< 20 mΩ <i>< 20 mΩ</i>
Isolationswiderstand <i>Insulation Resistance</i>	> 1000 MΩ <i>> 1000 MΩ</i>
Spannungsfestigkeit <i>Test Voltage</i>	1 kV AC <i>1 kV AC</i>
Nennspannung <i>Voltage Rating</i>	320 V AC/DC <i>320 V AC/DC</i>
Nennstrom <i>Current Rating</i>	9 A <i>9 A</i>
Temperaturbereich <i>Temperature Range</i>	-40 °C ... +125 °C <i>-40 °C ... +125 °C</i>
Verarbeitung <i>Processing</i>	260 °C max. für 3-5s <i>260 °C max. for 3-5s</i>



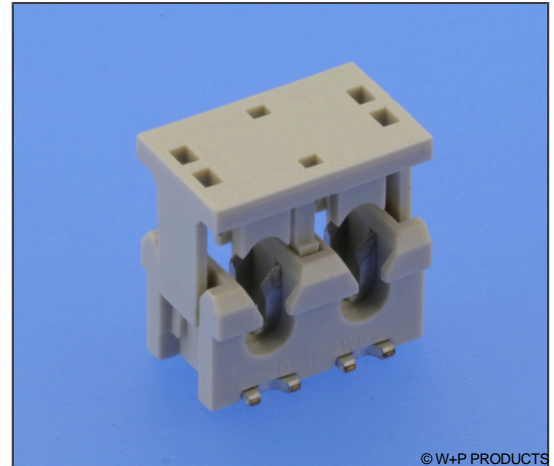


© W+P PRODUCTS




Wire Through Hole

Wire Stop

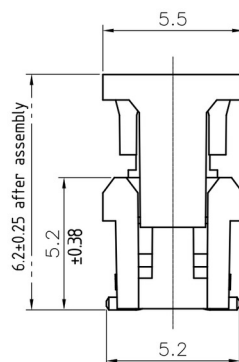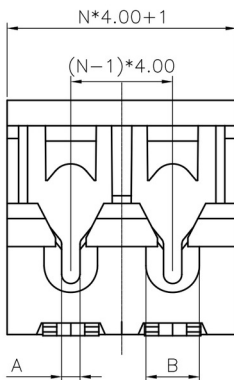

N=No. of positions

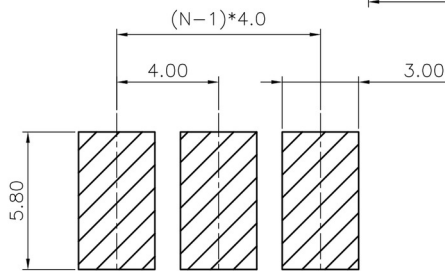

RECOMMENDED PCB LAYOUT
TOLERANCE=±0.05mm

(Table A)

Wire Gauge	Wire OD(Insulation)	A(mm)	B(mm)
AWG #20	Ø1.6~2.1mm	0.60	2.1
AWG #18		0.72	

Series	Contacts*	AWG*	Type*	Plating	Package
5261	02 01/02/03	18 20 AWG 20 18 AWG 18	0 0 Durchgangstyp Wire through 1 Endtyp Wire stop	50 50 Sn	TR TR Tape&Reel

* Dies ist ein **Bestellbeispiel** -
bitte durch Ihre Spezifikationen ersetzen.
* This is an **order example** -
please replace by your specifications.