


5262







SMT Kompakt-Anschlussklemmen RM 3mm – stehend SMT Compact Terminal Blocks 3mm Pitch – vertical

Technische Daten / Technical Data

Isolierkörper <i>Insulator</i>	Thermoplast, nach UL94 V-0 <i>Thermoplastic, rated UL94 V-0</i>
Farbe <i>Colour</i>	Weiß <i>White</i>
Kontaktmaterial <i>Contact Material</i>	Kupferlegierung <i>Copper alloy</i>
Aderquerschnitt <i>Applicable wire Gauge</i>	AWG 24 ~ 22 <i>AWG 24 ~ 22</i>
Durchgangswiderstand <i>Contact Resistance</i>	< 20 mΩ <i>< 20 mΩ</i>
Isolationswiderstand <i>Insulation Resistance</i>	> 1000 MΩ <i>> 1000 MΩ</i>
Spannungsfestigkeit <i>Test Voltage</i>	1 kV AC <i>1 kV AC</i>
Nennstrom <i>Current Rating</i>	5 A <i>5 A</i>
Temperaturbereich <i>Temperature Range</i>	-40 °C ... +105 °C <i>-40 °C ... +105 °C</i>
Verarbeitung <i>Processing</i>	260 °C max. für 3-5s <i>260 °C max. for 3-5s</i>

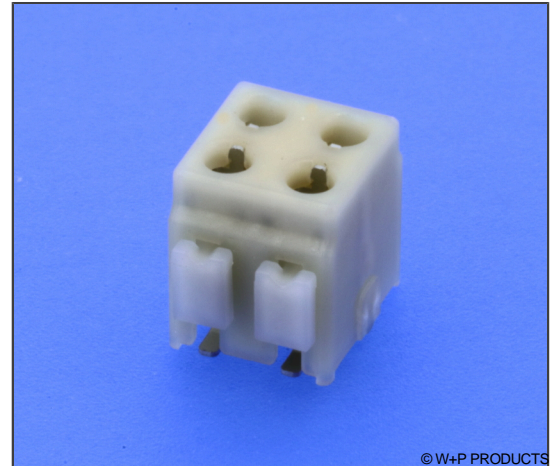

© W+P PRODUCTS



Series

5262

Contacts

04

04

Plating

50

50 Sn

Package

TR

TR Tape&Reel