

Technische Daten / Technical Data


| | |
|-----------------------|-----------------|
| Durchgangswiderstand | < 30 mΩ |
| Contact Resistance | < 30 mΩ |
| Isolationswiderstand | > 1000 MΩ |
| Insulation Resistance | > 1000 MΩ |
| Spannungsfestigkeit | 500 V AC |
| Test Voltage | 500 V AC |
| Nennspannung | 30 V RMS |
| Voltage Rating | 30 V RMS |
| Nennstrom | 1,5 A bei 25 °C |
| Current Rating | 1,5 A at 25 °C |
| Temperaturbereich | 0 °C ... +70 °C |
| Temperature Range | 0 °C ... +70 °C |

UL 2725, doppelt geschirmt, 2*AWG28 + 2*AWG24

UL 2725, double shielded, 2*AWG28 + 2*AWG24

Veredelung 30µ" (0,75µm) Au im Kontaktbereich, entspr. **USB 2.0**


Plating 30µ" (0.75µm) Au in contact area, according to **USB 2.0**

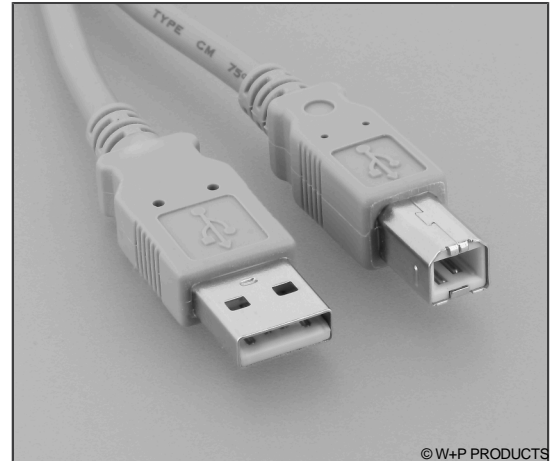


© W+P PRODUCTS

In schwarz und grau erhältlich
Weitere Farben auf Anfrage
Available in black and grey
More colours on request


Type 1: USB A male - USB A male

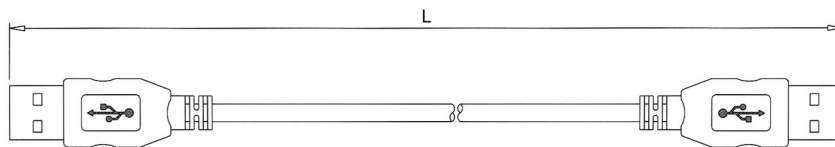


Type 2: USB A male - USB B male

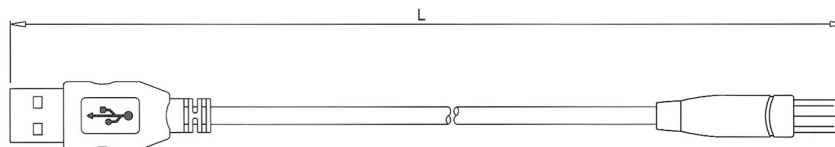


Type 3: USB B male - USB B male



Type 4: USB A male - Mini-USB B male

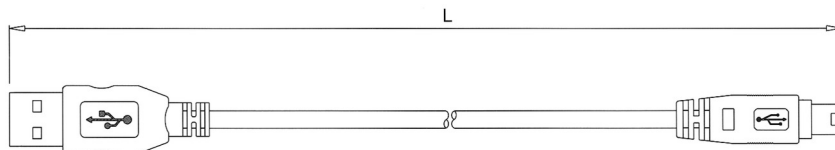


Type 5: USB A male - USB A female

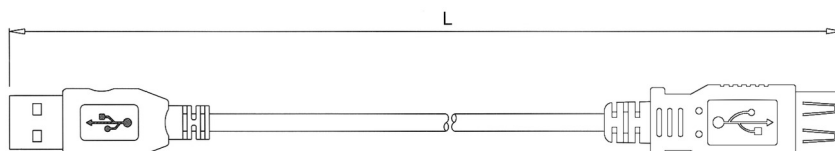


826

USB 2.0 Kabelkonfektionen USB 2.0 Cable Assemblies


Type 7: USB B male - Micro-USB A male



Type 8: Micro-USB B male - Micro-USB B male



Type 9: USB A male - Micro-USB B male

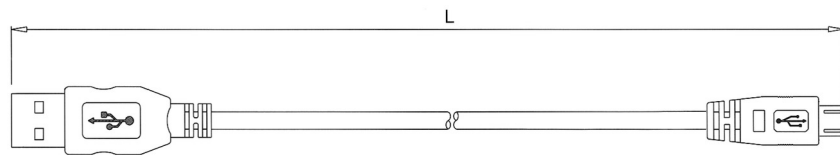

Gehäusemaße / Housing Dimensions

| Type | L x W x H (Ref.) |
|---------------------------|----------------------|
| USB A Male (Type 1,2,4,5) | 27.7 x 15.0 x 7.9mm |
| USB B Male (Type 2,3,7) | 26.7 x 11.4 x 10.5mm |
| USB A Female (Type 5) | 51.3 x 16.2 x 11.1mm |
| Mini USB B M (Type 4) | 18.6 x 11.6 x 9.0mm |
| Micro USB A M (Type 7,8) | 19.5 x 11.0 x 7.5mm |

| Series | Type* | Length (L)* | Colour (Option)* | Wire Gauge (Option)* |
|------------|--|---|--|---|
| 826 | 1 | 100 | .. | .. |
| | 1 USB A (male) <=> USB A (male) 2 USB A (male) <=> USB B (male) 3 USB B (male) <=> USB B (male) 4 USB A (male) <=> Mini-USB B (05 pins, male) 5 USB A (male) <=> USB A (female) 7 USB B (male) <=> Micro-USB A (male) 8 Micro-USB B (male) <=> Micro-USB B (male) 9 USB A (male) <=> Micro-USB B (male) | 050 50cm 100 100cm 200 200cm 300 300cm 500 500cm -xxx Nach Kundenangabe Customer-specific | Standard Schwarz Black 60 Grau Grey | Standard 2x AWG 28 + 2x AWG24 2820 2x AWG 28 + 2x AWG20 2822 2x AWG 28 + 2x AWG22 2826 2x AWG 28 + 2x AWG26 2828 2x AWG 28 + 2x AWG28 |

* Dies ist ein **Bestellbeispiel** - bitte durch Ihre Spezifikationen ersetzen.
 * This is an **order example** - please replace by your specifications.